


# Features



- Firmware and software field upgradable
- Support upgrade from CMYK to 7 colors(Support 8 channels)
- Resolution can be upgraded from 600 dpi to 1200dpi
- Future new technology and function can be upgraded accordingly

000109014

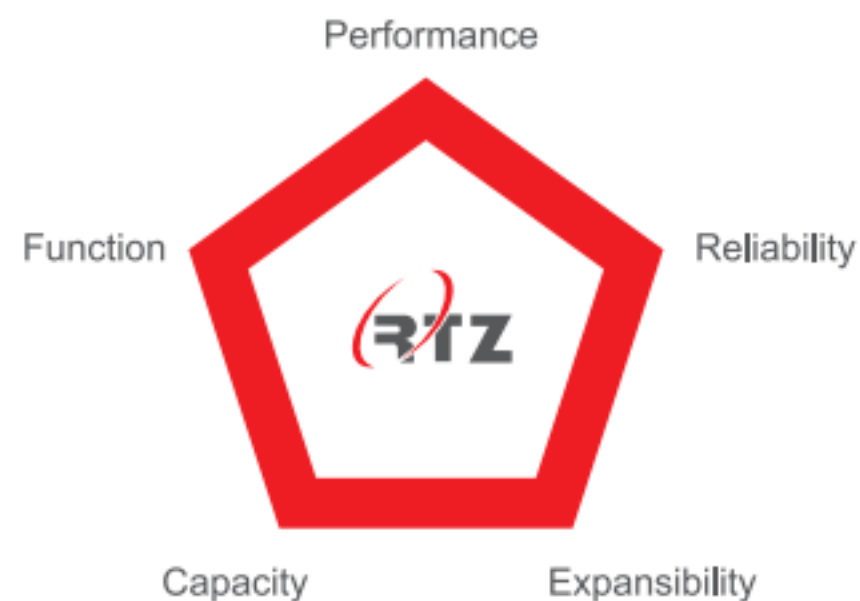

- High speed, full color VDP

One-button cleaning, easy to operate freely, more comfortable, short preparation time

High precision print head adjustment, guarantee high quality printing

High stability, the printer can run at full capacity for long time

High integration friendly GUI, very easy to operate




数字喷墨印刷设备制造商

Digital Inkjet Printing Equipments Manufacturer

[www.floradigital.com.cn](http://www.floradigital.com.cn)

## J-330 Label Digital Printer

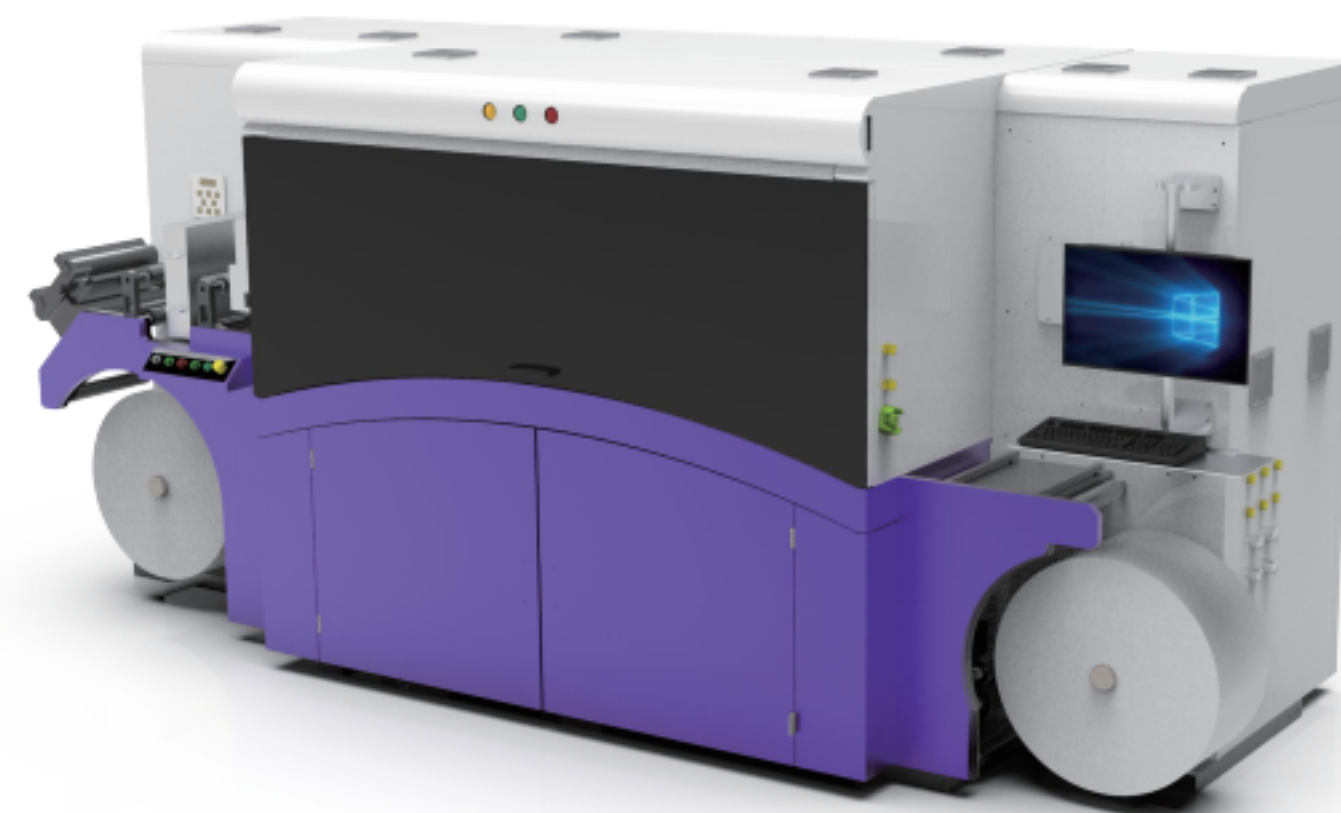

Shenzhen Runtianzhi Digital Equipment Co.,Ltd  
Add: Guanlan Hi-tech Industry Park, Huanguan South Road, Longhua District,  
Shenzhen, Guangdong, China P.C.:518110

Tel:+86-755-27521721  
Email: [sunny\\_yu@floradigital.com.cn](mailto:sunny_yu@floradigital.com.cn)


Fax:+86-755-27521901



Shenzhen Runtianzhi Digital Equipment Co.,Ltd

# Application

- Greater flexibility —
- Faster delivery —
- More personalized —
- More reliable —

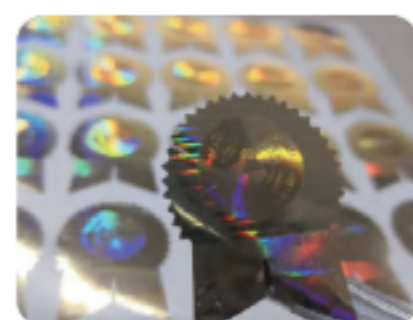

# Label Digital Printer

## Technical specifications

Model	J-330
Print head	Kyocera industry print head( DOD)
Max. Print width	330mm
Productivity	Quality 50m/min Speed 75m/min
Resolution	1200x600dpi(Upgradable to 1200x1200dpi)
Ink type	UV ink
Color	Standard CMYK, Orange, Violet and White optional, total 8 channels
Curing	LED pining, UV curing
Image format	PDF/TIFF/BMP (Support PDF VDP)
Media	Paper: Coated paper/matte paper,etc Film: PET/PP/PE etc, aluminum foil etc
Feeding	Roll to roll
Roll diameter	Roll OD: 700mm, Core diameter: 76mm(3" air shaft)
Winding	Roll OD: 700mm, Core diameter: 76mm(3" air shaft)
Other functions	Servo motor for winding and unwinding; Web guide; Corona; Web cleaning; Anti-static
Optional	On-line process, inline inspection
Dimension & Weight	
Dimension(LxWxH)	4,300x1,680x2,080mm
Setup space	4,800x4,500x2,080mm
Weight	3440kg
Electricity & Air	
Print unit	AC380V, three phase, 50/60Hz, 30KW
Corona	AC380V, three phase, 50/60Hz, 3.2KW
UV curing	AC380V, three phase, 50/60Hz, 8KW
Air	Dry compress air, 6-8bar
Environment	
Temperature	20-25°C
Relative humidity	20%-80%, Non-condensation
Environment	Low dust, less light
Ink stock Temp.	15-30°C